


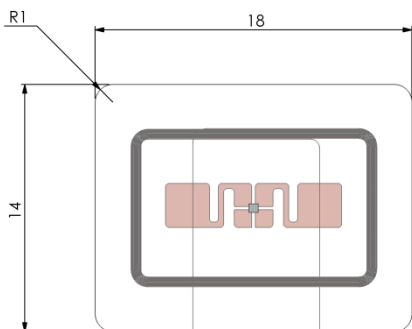


1408



Protocol : ISO 15693

Operating frequency : 13,56 MHz

Antenna dimensions

<i>Antenna size</i>	<i>14x10 mm</i>	Packaging	<i>PET</i>
<i>Die-cut size</i>	<i>18x14 mm</i>	<i>Delivery</i>	<i>Single not adhesive</i>
<i>Web width</i>		<i>Quality</i>	<i>100% performance tested</i>

Packaging

Part N.		UID	Memory size	Data endurance	Data retention
TG321408	NXP Icode slix-l	64bit	512 bit	50 years	100.000 cycles
TG361408	NXP Icode slix	64bit	1024 bit	50 years	100.000 cycles
TG151408	NXP Icode slix-s	64bit	2048 bit	50 years	100.000 cycles
TG441408	STM LRI1K	64bit	1048 bit	40 years	1.000.000 cycles
TG061408	STM LRI2K	64bit	2048 bit	40 years	1.000.000 cycles

Smart res RFID reserves the right to change its products and services at any time without notice. Our recommendations are based on our latest knowledge and experience. As our products are used in circumstances beyond our control, we cannot be held liable for any damage caused through their use.