


1445




smartres

Innovative RFID production



Protocol : ISO 15693

Operating frequency : 13,56 MHz

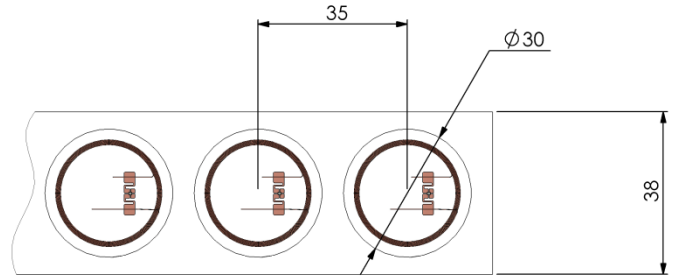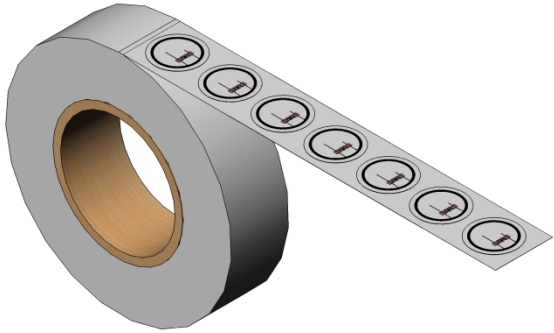

Antenna dimensions

Packaging

Antenna size	Diam. 25 mm	Material	Paper
Die-cut size	Diam 30 mm	Delivery	Reel 1000 pcs
Web width	38 mm	Quality	100% performance tested

Part N.		UID	Memory size	Data endurance	Data retention
ET321445	NXP Icode slix-l	64bit	512 bit	50 years	100.000 cycles
ET361445	NXP Icode slix	64bit	1024 bit	50 years	100.000 cycles
ET151445	NXP Icode slix-s	64bit	2048 bit	50 years	100.000 cycles
ET441445	STM LRI1K	64bit	1048 bit	40 years	1.000.000 cycles
ET061445	STM LRI2K	64bit	2048 bit	40 years	1.000.000 cycles

Smart res RFID reserves the right to change its products and services at any time without notice. Our recommendations are based on our latest knowledge and experience. As our products are used in circumstances beyond our control, we cannot be held liable for any damage caused through their use.

Smart Res SpA
41057 SPILAMBERTO (MO) ITALY – Via dei Marmorari, 84
Phone +39 059 7862701 - Fax +39 059 784615
info@smartres.eu – www.smartres.eu

